
Nuova Rade


Marine - Plastics Technology Experts

INSTRUCTIONS


1. Rinse tank thoroughly with fresh water.
2. Attach the inlet and outlet at desired positions on the already welded tank fittings' adapter.
3. Tighten the elbow fitting with the provided moveable tightening ring nut DO NOT OVERTIGHT.
4. When the tank is not used, please fill the tank with water and sodium bicarbonate in order to remove the remnants of algaes. Rinse with fresh water and store the water tank in a dry place. Repeat this operation, if needed, at the beginning of each new season.


Inlet

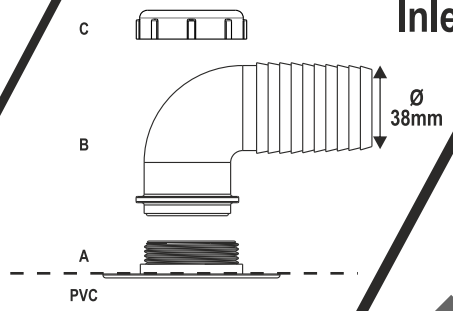

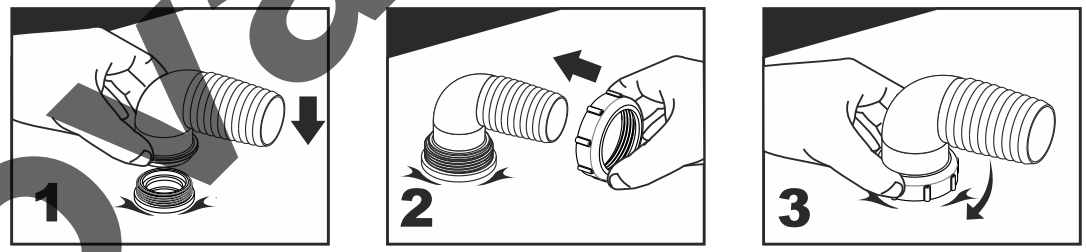

Outlet

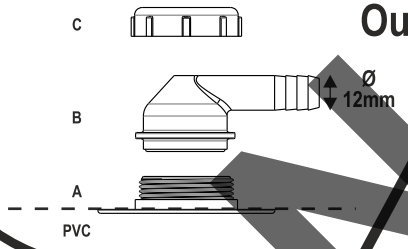

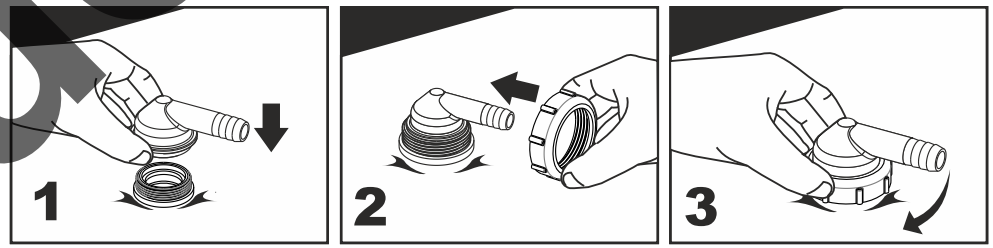

www.nuovarade.com

DO NOT OVERFILL

Nuova Rade