

Product Specification

Key Ignition Switch Panel

SP4010


Product Features:

- LED indicator
- 2 Keys included

Product Specifications:

Material:	Nylon 66
Circuit Protection:	-
Ratings:	DC 12V Maximum Cumulative Amp: 10 A
Panel Depth:	45 mm
Dimensions:	69 x 69 mm
Panel Cut-out:	Ø 40 mm

Wiring Diagram

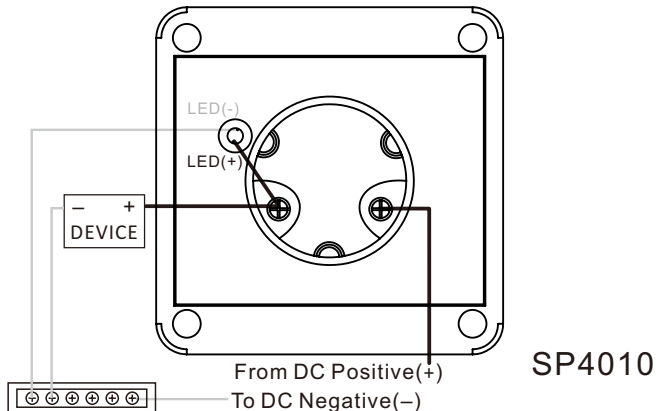

Installation Instructions

- 1. Disconnect all power (AC & DC)**
Disconnect positive cables from all batteries and AC shore power cord from the yacht.
- 2. Cut opening for mounting location**
Using the mounting dimensions provided to measure and cut out the mounting hole in the surface where the panel is to be mounted.
- 3. Connect Positive and Lamp negative feed wire**
Connect the DC power source (the batteries) to the screw terminal away from the LED. Then connect the LED negative wire (black) to a DC negative bus bar.
- 4. Connect the LED positive wire and devices**
Connect the LED positive wire (red) to screw terminal near the LED. Connect the device or distribution panels to the same screw terminal.
- 5. Mount the switch panel**
Clean the surface where the panel is to be mounted carefully. Place the panel and screw down the panel to the mounting surface as tight as possible with self-tapping screws.
- 6. Reconnect and Test**
Reconnect all the AC & DC powers to supply power to the panel. Turn on and off all branch circuits to check if the panel works normally.